


An-flex

AIRLESS SPRAY PAINT HOSE SERIES 1WP

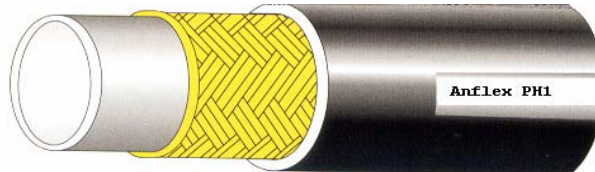

Technical features of the airless spray paint 1WP Series hoses with Wire Braid

Type Ref.	Inner ϕ		Outer ϕ		Working Pressure		Burst Pressure		Minimum Bend Radius		Weight kg/m.
	ins.	mm.	ins.	mm.	BAR	PSI	BAR	PSI	ins.	mm.	
1WP- 04	1/4"	6.4	0.46	11.70	520	7540	1300	18850	2.5	63	0.165
1WP- 06	3/8"	9.6	0.60	15.30	400	5800	1000	14500	4.0	100	0.253

Technical-constructive features:

Internal core in polyamide, reinforcement with a textile cord braid, exterior covering in polyurethane; on request it is also available micro perforated.

Applications:

The hoses in 1WP series have been created for the medium pressure conduction of isocyanates, polyols, solvents and paints.

Utilization temperature:

From -40°C to +95°C

Max. working temperature of air, water and fluids containing water: +65°C

Working pressure:

SAE standards safety ratio 1:2.5